

D-351 SEALING MACHINE: ELECTRO-MAGNETE OPERATION

CONFORM TO
DIN 58953 P.7



35900

CE

35900 D-351 IMPULSE SEALING MACHINE

Compact impulse medical sealers, designed to be used in medical, dental, oculistic surgeries and test laboratories.

Main features: sealing and cutting length 35 cm - Safety check with alarm. Main board with temperature control to

avoid overheating of the sealing wire - Sealing bars closed by electromagnet. Complete with foil-roll dispenser and built-in cutting device.

Easy: the bars close automatically by the pressure of one finger. The electro-magnet guarantees a steady sealing pressure for the whole set period. The sealing bar opens automatically at the end of the cycle.

Quick: the electro-magnetic system allows a substantial saving of the packing time. Quick foil feeding.

Safe: the machine does not start the sealing cycle if there is an object with a thickness over 3 mm between the bars.

The electronic temperature control through a NTC probe provides a perfect temperature accuracy from seal to seal. The electronic alarm function avoids any overheating.

• 35902 TEFLON - spare

• 35903 RESISTOR - spare

TECHNICAL SPECIFICATIONS

Sealed materials: paper/polyethylene/polyester

Sealing length - width: 350 mm - 8 mm as per DIN 58953-7:2010

Electronically controlled sealing time: 0.5 sec.

Cutting length: 350 mm

Foil-roll dispenser 350 mm

Power: 230V- 50/60 Hz single - phase


Max absorption: 900W, only during the sealing time

Dimensions: 44x17.5x31 cm

Weight: 18 kg

GD-301 EVO SEALING MACHINE FOR CONTINUOUS HEAT SEALING

MADE IN ITALY

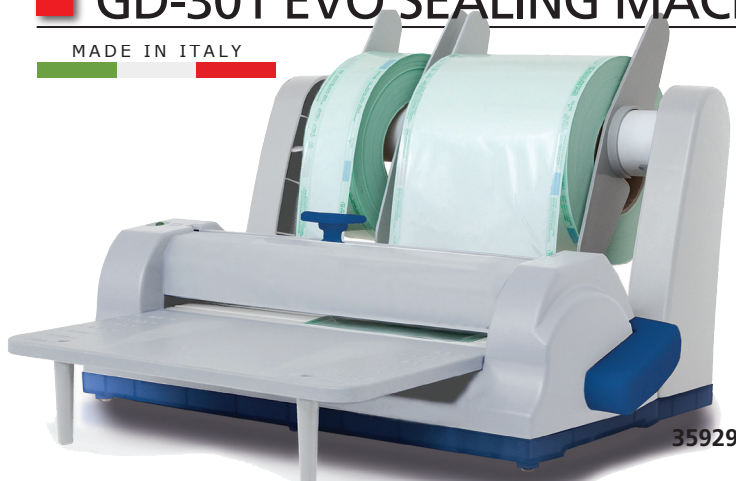

35929

TECHNICAL SPECIFICATIONS

Flat sealing 12 mm

Sealing length 300 mm

Thermo controlled continuous heat sealing

Built-in cutting device

Fixed sealing temperature and time

Manual actuation

Power 230 V / 50-60 Hz, single phase

Electrical input: 900 W

Protection degree IP 20

Sealer dimensions 452x248x146 mm

Roll-holder dimensions 458x412x242 mm

• 35928 GD-301 EVO SEALING MACHINE - machine only

• 35929 GD-301 EVO SEALING MACHINE - complete

Manual heat sealer for medical pouches and reels according to DIN 58953-7:2008. 3 ceramic heater elements for a faster and more accurate sealing and improved infeed and outfeed guide to keep film flat (infeed) and prevent the film moving upward inside machine.

Available in 2 versions: compact without accessories (35928) or with sealer roll holder, cutter and plane (35929). User friendly, reliable and extremely compact, ideal in dentistry, medical and veterinary laboratories. Sealing bar 300 mm manually actuated by a lever. Thermo controlled continuous heat sealing, to save consumables. Compact vertical design to reduce space. Integrated, removable roll-holder, can stand alone apart from the sealer. Usable only with polypropylene film coupled to medical grade paper and/or plastic envelopes suitable for steam sterilization.

• 35933 CERAMIC HEATING ELEMENTS - spare

• 35935 BLADES - kit of 5 - spare



35928

TRACKING SYSTEM DOCUMENTATION: 2 LINE LABELER

TRACEABILITY/DOCUMENTATION

The traceability system of the instruments provides a proper and easy handling of sterilized materials. This system tracks each instrument, from the preparation to the sterilization and to its final use. The combined use of Labeler and Labels will give you a complete and essential data system for the safeguarding of each healthcare operator.

- easy print of identical labels with minimum time and effort
- it eliminates mistakes in batch numbers
- easy interpretation of the results due to precise colour change
- no need for additional process indicators using our labels with indicator

35980 2 LINE MEDICAL LABELER 14+14 DIGITS

Reliable, easy to use and durable, it allows to print all requested information on the labels: lot No, sterilizer/cycle No, sterilization date and expiry date.

35984 2 LINE STEAM LABEL - box of 12,000 (24 rolls of 500 labels)

First print line can display: 3 alphabetic digits + 11 numbers
Second print line can display: 14 numbers

Steam indicator label, suitable for steam sterilization cycle. Double adhesive support. After the sterilization cycle the indicator changes from original PINK colour to BROWN.

Process indicator: Steam Standard ISO 11140-1

Class 1, non toxic ink, latex free.

35982 INK ROLL FOR LABELER - box of 5

35982



35980

MADE IN ITALY



Supplied with multilingual manual (GB, FR, IT, ES, PT, DE, GR, PL, RO) and 1 ink roll.

35984

BEFORE STERILIZATION	
Lot number	STE05 14587
Sterilization date	21.10.19 21.10.20

AFTER STERILIZATION	
Lot number	STE05 14587
Sterilization date	21.10.19 21.10.20

We have shown a preferred use of first print line, but user can print alternative information