

## GIMACARE MULTIPARAMETER MONITOR - 6 PARAMETERS

### • 24128 GIMACARE MULTI-PARAMETER MONITOR

- 6 parameters - GB, FR, IT, ES, PT, DE, RO, GR

6 in 1 multiparameter diagnostic device for the periodic self-monitoring of various risk factors: blood glucose,  $\beta$ -ketone, lactate, cholesterol, uric acid and hemoglobin.

Ideal for homecare use. Results in 5 minutes.

#### Automatic strip identification system

Automatic strip recognition technology in one meter as guide to the right test

#### Bluetooth connected device

Data transmission thanks to Bluetooth connection with the development of miniaturization and wireless communication.

Free connection to ProCheck App

#### 3 coloured indication lights

1 colour indicator for correct strip insertion

- blue: strip guiding light

2 different colour indicators to understand whether results are low, high or in range

- green: within target range

- red: out of target range (low or high)

#### Additional features:

- automatic quality control

- before/after meal presettable

- strip ejector

- strip expiry date reminder


- auto sample loading detection

- auto electrode insertion detection

Supplied with lancing device, 10 sterile lancets, user guide, carrying case and user manual in GB, FR, IT, ES, PT, DE, RO, GR.




#### 6 PARAMETERS



CE 0123

| GIMA code     | STRIPS FOR GIMACARE - IN VIAL  |                                   | Minimum order |               |
|---------------|--------------------------------|-----------------------------------|---------------|---------------|
| 24132         | Glucose strips                 |                                   | vial of 25    |               |
| 24133         | Ketone strips                  |                                   | vial of 25    |               |
| 24134         | Lactate strips                 |                                   | vial of 25    |               |
| 24135         | Cholesterol strips             |                                   | vial of 25    |               |
| 24136         | Uric acid strips               |                                   | vial of 25    |               |
| 24137         | Hemoglobin strips              |                                   | vial of 25    |               |
| GIMA code     | CONTROL SOLUTIONS FOR GIMACARE |                                   | Minimum order |               |
| 24139         | Glucose control solution       |                                   | 1             |               |
| 24140         | Ketone control solution        |                                   | 1             |               |
| 24141         | Lactate control solution       |                                   | 1             |               |
| 24142         | Cholesterol control solution   |                                   | 1             |               |
| 24143         | Uric acid control solution     |                                   | 1             |               |
| 24144         | Hemoglobin control solution    |                                   | 1             |               |
| LANCETS       |                                |                                   |               |               |
| 23917         | Lancets 28G - sterile          |                                   | bag of 25     |               |
| 23916         | Lancets 28G - sterile          |                                   | bag of 100    |               |
| PARAMETERS    |                                | MEASUREMENT RANGE                 | Sample size   | Reaction time |
| Blood Glucose |                                | 10-800 mg/dL - 0.56-44.4 mmol/L   | 0.5 µl        | 5 seconds     |
| Ketone        |                                | 0.1 - 8.0 mmol/L                  | 0.8 µl        | 10 seconds    |
| Lactate       |                                | 0.3 - 22 mmol/L                   | 0.8 µl        | 5 seconds     |
| Cholesterol   |                                | 100-400 mg/dL - 2.5-10.3 mmol/L   | 3.0 µl        | 60 seconds    |
| Uric acid     |                                | 3-20 mg/dL - 178-1190 µmol/L      | 0.5 µl        | 15 seconds    |
| Hemoglobin    |                                | 6.8 - 24 g/dL - 4.22-14.89 mmol/L | 0.5 µl        | 10 seconds    |

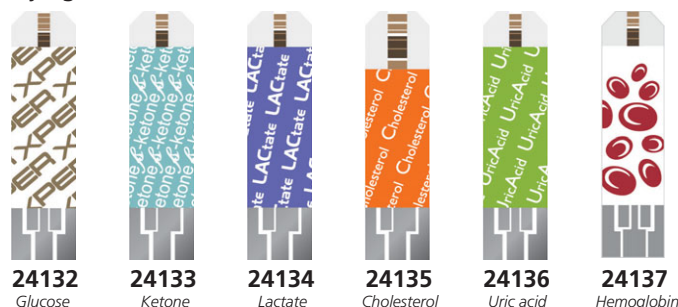

#### TECHNICAL SPECIFICATIONS

Ketone warning: yes  
 Day average: 7, 14, 21, 28, 60, 90 days for blood glucose  
 Alarm: 4 daily alarms  
 Memory: 1000 measurements  
 Connection: Bluetooth  
 Power supply: 2 x 1.5 V AAA batteries  
 Size - weight: 102.5x59.6x21.8 mm - 64.4 g (without batteries)

## ANALYTICON URILYZER® 500 PRO URINE ANALYZER

### • 24050 URILYZER® 500 PRO URINE ANALYZER with printer

Semi-automated and compact urine test strip analyzer with continuous loading function. The high throughput of up to 500 tests/hour in combination with state-of-the-art operator and data management functions provide the ideal system for mid-sized to bigger laboratories and hospitals. It also provides enhanced QC management and connectivity capabilities to meet the growing demands for compliance management and data capture.

Available software in GB, FR, IT, ES, DE, PL, HU, RO, SE, RU.

- external barcode reader


- built-in thermal printer with automatic printout or transfer of results

- up to 500 tests/hour due to the possibility of testing urine strips continuously

- implemented protocols: LIS2 (ASTM+) and HL7

- customization of the QC protocol according to regulatory requirements and laboratory standards.

Moreover, the system offers high quality and efficiency, high level of customization with flexible testing and reporting options.

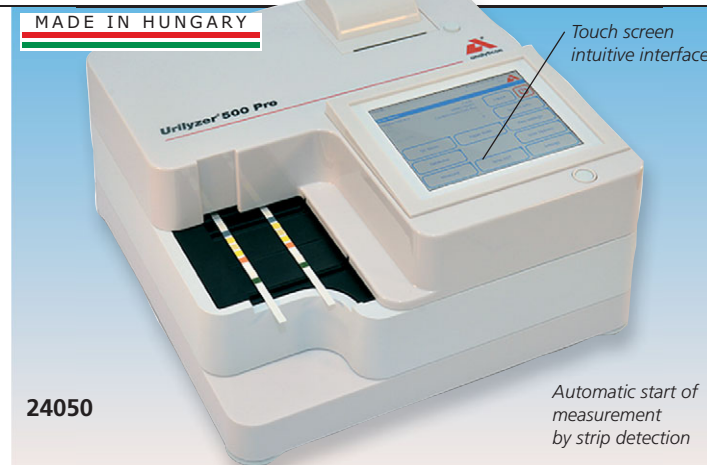

#### TECHNICAL SPECIFICATIONS

Measuring method: reflectance photometer with 4 discrete wavelengths  
 Parameters: Bilirubin, Urobilinogen, Ketones, Ascorbic Acid, Glucose, Protein (Albumin), Blood (Hemoglobin), pH, Nitrite, Leucocytes, Specific Gravity  
 Measurements: up to 500 tests/hour

Data storage: patient database: 5.000 tests / QC database: 5.000 tests  
 Display: 5.7" LCD VGA capacitive touchscreen  
 Interfaces: serial RS232, USB Type A, USB Type B, PS2 (external keyboard, barcode reader), Ethernet  
 Power supply: 12V DC/5A  
 Size- weight: 300x300xh 180 mm - 6.5 kg

## BD VENFLON™ PRO SAFETY I.V CATHETERS - STERILE


BD Venflon™ Pro Safety Needle Protected IV Cannula is a ported, passive safety peripheral IV catheter (PIVC) designed to help minimise the risk of unanticipated blood spatter and needlestick injuries (NSIs).

**BD Vialon™ catheter material** (polyurethane, radiopaque and biocompatible) softens in the vein up to 70%, enabling longer dwell times, minimizing restarts and reducing the risk of mechanical phlebitis.

Ergonomic design to accommodate a variety of techniques.

**Back-cut needle design** to offer optimal skin and vein penetration. **Flexible wings** help provide comfortable securement for the patient. **"Snap" cap** helps prevent port being accidentally opened. **Removable white vent cap**

| GIMA code | BD code  | BD VENFLON PRO SAFETY NEEDLES |           |       | Minimum order |
|-----------|----------|-------------------------------|-----------|-------|---------------|
| Gauge     | Gauge mm | Colour                        |           |       |               |
| 23712     | 393226   | 18G                           | 1,3x32 mm | green | box of 50     |
| 23713     | 393224   | 20G                           | 1,1x32 mm | pink  | box of 50     |
| 23714     | 393222   | 22G                           | 0,9x25 mm | blue  | box of 50     |

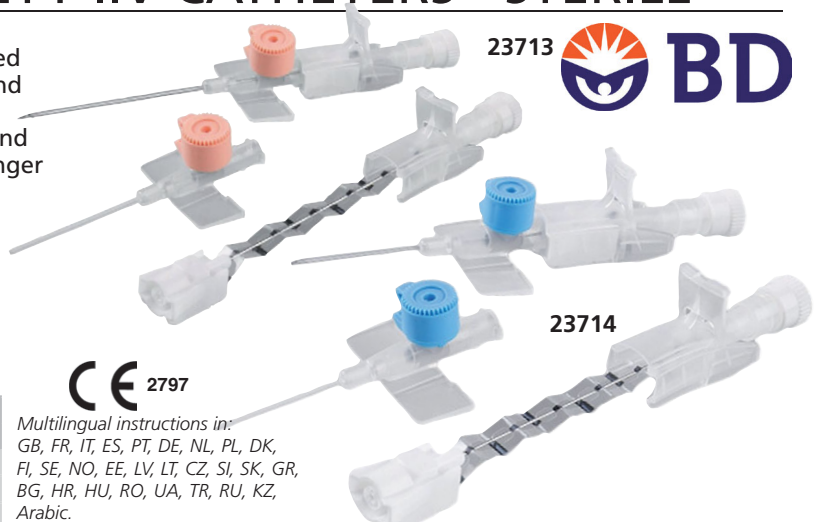

CE 2797  
Multilingual instructions in:  
GB, FR, IT, ES, PT, DE, NL, PL, DK,  
FI, SE, NO, EE, LV, LT, CZ, SI, SK, GR,  
BG, HR, HU, RO, UA, TR, RU, KZ,  
Arabic.

## SILICONE SELF-ADHERING MALE EXTERNAL CATHETERS

Male external catheter with tray made of 100% ultrathin silicone, that eliminates risk of latex related skin irritations. This material has the highest water vapor permeability. Soft, breathable and odour free silicone provides greater patient's comfort and healthier skin with less risk of maceration. Adhesive band is part of the catheter sheath: it facilitates the application and offers patient's safety and extended wearing period. Integrated tray ensures that adhesive ends do not stick together. Its transparency allows easy skin inspection.

### Security

Kink-resistant silicone funnel helps to ensure continuous urine flow and secured connection to all major types of urine collectors.

### Ease of use

One-piece system easy to apply and to remove, secured to the skin with an acrylic adhesive.

### A perfect fit for most patients

It has a standard-length sheath with strong adhesive and is available in five different sizes.

Individually packed in a plastic bag in a box of 30.



| GIMA code | MALE EXTERNAL SILICONE CATHETERS     | Size | Minimum order |
|-----------|--------------------------------------|------|---------------|
| 28735     | Male ext. catheter with tray Ø 24 mm | S    | box of 30     |
| 28736     | Male ext. catheter with tray Ø 28 mm | M    | box of 30     |
| 28737     | Male ext. catheter with tray Ø 31 mm | M/L  | box of 30     |
| 28738     | Male ext. catheter with tray Ø 35 mm | L    | box of 30     |
| 28739     | Male ext. catheter with tray Ø 40 mm | XL   | box of 30     |

## STOCKINETTE

### • 23659 STOCKINETTE LEGGING

25x75 cm - medium

- sterile - box of 60

### • 23660

### STOCKINETTE LEGGING

35x120 cm - large - sterile - box of 40

For orthopedics


and gynaecology

MADE IN ITALY

Multilingual instructions and label (as leggings)

## BI-LAYER NON-WOVEN STERILE SURGICAL DRAPES

Single-use sterile surgical drapes made of non-woven, absorbent and waterproof material. Made with no natural rubber or latex. Class IIa.

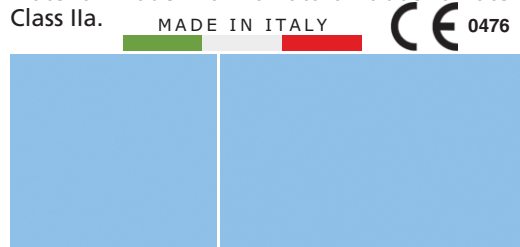

Multilingual instructions and label: GB, FR, IT, ES, PT, DE, NL, DK, SE, NO, FI, LT, LV, CE, PL, CZ, SK, HU, SI, HR, RO, BG, GR, Arabic

| GIMA code | DRAPES        | Minimum order |
|-----------|---------------|---------------|
| 23580     | Drape 50x50   | box of 350    |
| 23581     | Drape 45x75   | box of 360    |
| 23582     | Drape 75x90   | box of 170    |
| 23583     | Drape 100x100 | box of 120    |
| 23584     | Drape 100x150 | box of 80     |
| 23585     | Drape 150x150 | box of 70     |
| 23586     | Drape 150x200 | box of 50     |
| 23587     | Drape 150x240 | box of 40     |
| 23588     | Drape 200x200 | box of 40     |
| 23589     | Drape 200x250 | box of 30     |

## LEGGINGS


### • 23658 PAIR OF LEGGINGS

79x129 cm - sterile

- box of 40

For urology and

gynaecology



MADE IN ITALY

Multilingual instructions and label: GB, FR, IT, ES, PT, DE, NL, DK, SE, NO, FI, LT, LV, CE, PL, CZ, SK, HU, SI, HR, RO, BG, GR, Arabic

## STERILE SURGERY SETS

### • 23639 UNIVERSAL SURGICAL SET - sterile

- box of 12

1 table cover for instruments with

absorbent band 160x200 cm

1 Mayo table cover with absorbent band

80x145 cm

1 standard surgical drape with adhesive

tape 150x240 cm

2 standard surgical drapes with adhesive


tape 75x90 cm

1 standard surgical drape with adhesive

tape 150x200 cm

4 towels 30x40 cm

2 adhesive strips 8x50 cm

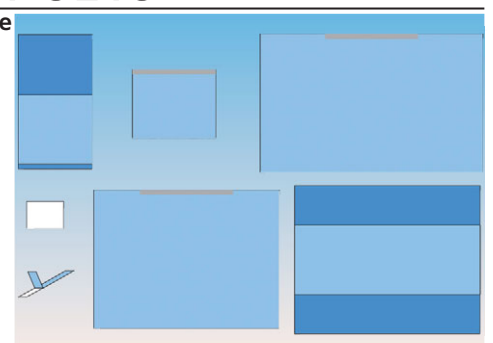

## AESCLAP SURGICAL INSTRUMENTS

### SCISSORS

**39102**

- **39101** Iris thin scissors - straight - sharp/sharp - 11 cm - BC110R
- **39102** Iridectomy and ligatures scissors - curved - sharp/sharp - 11 cm - BC111R

**39111**

- **39110** Surgical scissors - straight - blunt/blunt - 14.5 cm - BC314R
- **39111** Surgical scissors - straight - blunt/blunt - 15 cm - BC315R
- **39114** Surgical scissors - straight - sharp/blunt - 14.5 cm - BC324R
- **39115** Surgical scissors - straight - sharp/blunt - 16.5 cm - BC326R

Notch at the tip

**39140**

- **39140** Spencer suture scissors - straight - 11.5 cm - BC802R

**39122**

- **39120** Mayo scissors - straight - blunt/blunt - 15.5 cm - BC545R
- **39121** Mayo scissors - curved - blunt/blunt - 15.5 cm - BC555R
- **39122** Mayo scissors - straight - blunt/blunt - 16.5 cm - BC584R
- **39123** Mayo dissecting scissors - curved - blunt/blunt - 16.5 cm - BC587R

**39132**

- **39130** Metzenbaum scissors - Straight - blunt/blunt - 14.5 cm - BC601R
- **39131** Metzenbaum scissors - straight - blunt/blunt - 18 cm - BC602R
- **39132** Metzenbaum scissors - curved - blunt/blunt - 14.5 cm - BC605R
- **39133** Metzenbaum scissors - curved - blunt/blunt - 18 cm - BC606R

### NEEDLE HOLDER

**39280**

- **39280** Hegar-mayo needle holder - straight - 15 cm - BM235R
- **39281** Hegar-mayo needle holder - straight - 18.5 cm - BM236R

**39285**

- **39285** Hegar-olsen needle Holder - straight - 18.5 cm - BM291R

**39290**

- **39290** Mathieu needle Holder - straight - 14 cm - BM360R
- **39291** Mathieu needle holder - straight - 17 cm - BM361R

### CLAMPS AND FORCEPS

**39240**

- **39240** Foerster-ballenger clamp - straight - 18 cm - BF112R

**39245**

- **39245** Champ bernhard clamp - straight - sharp - 16 cm - BF426R

**39251**

- **39250** Backhaus towel clamp - curved - sharp - 11 cm - BF432R
- **39251** Backhaus towel clamp - curved - sharp - 13.5 cm - BF433R

**39255**

- **39255** Buttoned towel clamp - curved - 14 cm - BF464R

**39190**

- **39190** Hartmann mosquito hemostatic forceps - straight - 10 cm - BH104R
- **39191** Hartmann mosquito hemostatic forceps - curved - 10 cm - BH105R

**39197**

- **39195** Micro-halsted hemostatic forceps - curved - 12.5 cm - BH109R
- **39196** Halsted mosquito hemostatic forceps - straight - 12.5 cm - BH110R
- **39197** Halsted mosquito hemostatic forceps - curved - 12.5 cm - BH111R

**39200**

- **39200** Kelly hemostatic forceps - straight - blunt - 14 cm - BH134R
- **39201** Kelly hemostatic forceps - curved - blunt - 14 cm - BH135R

**39205**

- **39205** Crile hemostatic forceps - straight - blunt - 16 cm - BH166R
- **39206** Crile hemostatic forceps - curved - blunt - 16 cm - BH167R

**39210**

- **39210** Halsted hemostatic forceps - curved - blunt - 18.5 cm - BH203R

**39215**

- **39215** Kocher hemostatic forceps - straight - 1x2 teeth - 14 cm - BH614R
- **39216** Kocher hemostatic forceps - straight - 1x2 teeth - 16 cm - BH642R

**39220**

- **39220** De bakey forceps 1.5 mm - 15 cm - FB411R

### FORCEPS (TWEEZERS)

**39162**

- **39160** Dissection forceps - straight - 11.5 cm - BD043R
- **39161** Dissection forceps - straight - 13 cm - BD045R
- **39162** Dissection forceps - straight - 14.5 cm - BD047R
- **39163** Dissection forceps - straight - 16 cm - BD049R

**39174**

- **39170** Adson forceps - straight - 12 cm - BD222R
- **39172** Adson dissecting thin forceps - straight - 1x2 teeth - 12 cm - BD511R
- **39174** Adson dissecting forceps knurled - straight - 1x2 teeth - 12 cm - BD512R

**39177**

- **39177** Dissection forceps - straight - 1x2 teeth - 16 cm - BD559R



## AESCLAP TC SURGICAL INSTRUMENTS - DUROTIP® AND DUROGRIP®

### SCISSORS

39351



- **39350** Mayo TC durotip thin scissors - straight - blunt/blunt - 17 cm - BC242R
- **39351** Mayo TC durotip thin scissors - curved - blunt/blunt - 17 cm - BC243R
- **39355** Mayo TC durotip scissors - straight - blunt/blunt - 17 cm - BC252R
- **39356** Mayo TC durotip scissors - curved - blunt/blunt - 17 cm - BC253R

39366



- **39360** Baby metzenbaum TC durotip scissors - curved - blunt/blunt - 14.5 cm - BC259R
- **39365** Metzenbaum TC durotip scissors - curved - blunt/blunt - 14.5 cm - BC261R
- **39366** Metzenbaum TC durotip scissors - curved - blunt/blunt - 18 cm - BC263R
- **39367** Metzenbaum TC durotip thin scissors - curved - blunt/blunt - 18 cm - BC271R


### NEEDLE HOLDER

39391




- **39390** Castroviejo TC durogrip needle holder - straight - 0.2/14.5 cm - BM002R
- **39391** Castroviejo TC durogrip needle holder - straight - 0.4/18 cm - BM003R
- **39392** Castroviejo TC durogrip needle holder - straight - 0.2/18 cm - BM004R

39396

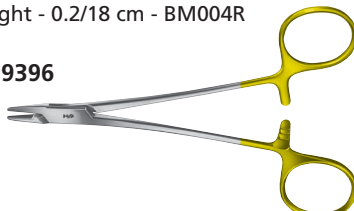

- **39395** Baby-crile-wood TC durogrip needle holder - straight - 15 cm - BM013R
- **39396** Baby-crile-wood TC durogrip needle holder - straight - 14.5 cm - BM016R
- **39400** Crile-wood TC durogrip needle holder - straight - 18.5 cm - BM017R

39406

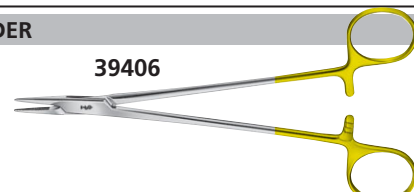

- **39405** Hegar-mayo TC durogrip needle holder - straight - 15 cm - BM065R
- **39406** Hegar-mayo TC durogrip needle holder - straight - 18.5 cm - BM066R

39411



- **39410** Hegar-olsen TC durogrip needle holder - straight - 16.5 cm - BM124R
- **39411** Hegar-olsen TC durogrip needle holder - straight - 14.5 cm - BM128R

39415



- **39415** Mathieu tc durogrip needle holder - straight - 17.3 cm - BM151R

AESCLAP® - a B. Braun brand

**B | BRAUN**  
SHARING EXPERTISE


## QUICK TOURNIQUETS

25748



ABS buckle

Multilingual box:

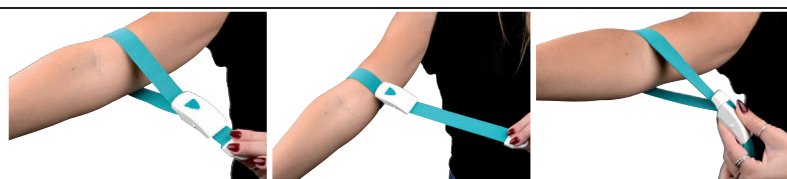

One hand use and quick release tourniquet

| GIMA code | TOURNIQUETS                   | Material        | Colour | Length cm | Width cm | Fastening systems            | Origin |
|-----------|-------------------------------|-----------------|--------|-----------|----------|------------------------------|--------|
| 25748     | Quick tourniquet              | Spandex/Elastan | Blue   | 45        | 2.5      | One hand use - quick release | Asia   |
| 25749     | Quick tourniquet - latex free | Spandex/Elastan | Green  | 45        | 2.5      | One hand use - quick release | Asia   |

## CUFFED AND UNCUFFED TRACHEOSTOMY TUBES

### CUFFED AND UNCUFFED TRACHEOSTOMY TUBES


Curve tubes designed to rapidly provide an airway within seconds during an emergency by inserting them into a tracheostomy stoma, a hole created in the neck and windpipe. The hollow tube whether with or without cuff, is directly placed into the trachea through a surgical incision, using a wire-guided progressive dilation technique.

- tube is made of medical grade, non-toxic, clear and kink-resistant PVC to protect delicate mucosal tissue
- smooth rounded obturator's tip reduces trauma during insertion
- neck plate with printed size for easy identification
- standard connector
- radio-opaque line helps to determine exact tube location

Tube includes: cuff (cuffed only), inflation line, valve, pilot balloon (cuffed only), obturator, neck plate, connector and tube ties. Sterile, single patient. Class IIa. DEHP-free. Made with no natural rubber or latex.

### Cuffed tracheostomy tubes additional features

- high-volume low-pressure cuff provides an effective low-pressure seal
- soft, thin-walled cuff ensures effective sealing and atraumatic intubation and extubation
- efficient one-way valve for cuff inflation and deflation

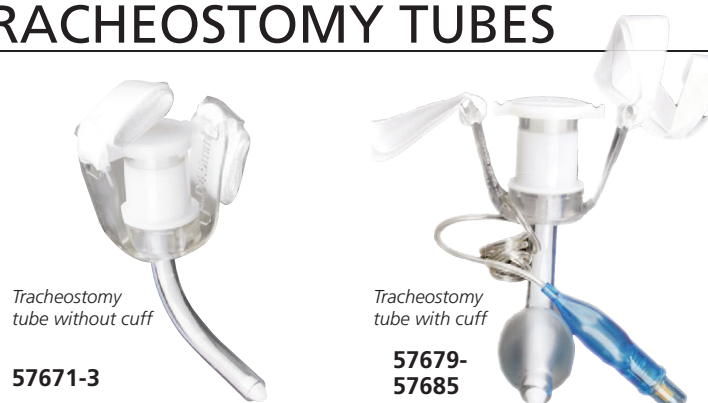

57671-3

57679-57685

| GIMA code                 | UNCUFFED TRACHEOSTOMY TUBES          | Minimum order |
|---------------------------|--------------------------------------|---------------|
| 57671                     | Uncuffed tracheostomy tubes Ø 4.0 mm | box of 10     |
| 57672                     | Uncuffed tracheostomy tubes Ø 4.5 mm | box of 10     |
| 57673                     | Uncuffed tracheostomy tubes Ø 5.0 mm | box of 10     |
| CUFFED TRACHEOSTOMY TUBES |                                      |               |
| 57679                     | Cuffed tracheostomy tubes Ø 6.0 mm   | box of 10     |
| 57680                     | Cuffed tracheostomy tubes Ø 6.5 mm   | box of 10     |
| 57681                     | Cuffed tracheostomy tubes Ø 7.0 mm   | box of 10     |
| 57682                     | Cuffed tracheostomy tubes Ø 7.5 mm   | box of 10     |
| 57683                     | Cuffed tracheostomy tubes Ø 8.0 mm   | box of 10     |
| 57684                     | Cuffed tracheostomy tubes Ø 8.5 mm   | box of 10     |
| 57685                     | Cuffed tracheostomy tubes Ø 9.0 mm   | box of 10     |

## PATIENT TRANSFER CHAIRS

- 44840 ISCHIA PATIENT TRANSFER CHAIR - blue
- 44842 ISCHIA PATIENT TRANSFER CHAIR - any colour

Transfer chair for patient transport within hospital or community environment, suited for admission, accident & emergency department (A&E) and ward transfer purposes.

It is also well suited for external transfers or when there is a need to

jump over obstacles or uneven ground smoothly.

Solid front wheels with Ø 30 cm and 2 swivelling rear castors Ø 12.5 cm. The carer can easily move the chair with patient on board, even in extremely small spaces.

With footrest fully touching the ground and backrest up, it enables the patient to safely perform any activities involving sitting or standing up.

Armrests can be flipped back to allow side access.

The backrest can be reclined via gas spring control creating a seat tilt (-33°/+6°) that allows for a better position to rest and relax.

Equipped with pushing handle, back pocket and pedal for the activation of "central braking system" and "steering-lock system" on the two rear wheels. Max weight capacity 160 kg. Class I M fire resistant.



Push handle with brake

AVAILABLE IN 24 COLOURS


Weight: 42 kg

Seat size: 470x545 mm

Footrest size: 243x380 mm

Armrest flip-back

Seat and backrest with padded surface for comfort



44840



Seat tilt -33°/+6°



Central braking system and steering-lock system

## HYDRAULIC TRANSFER CHAIR

- 43430 HYDRAULIC PATIENT TRANSFER CHAIR

Hydraulic transfer chair made of steel, ideal for transferring the patient from bed to toilet, shower or other sites.

It includes 3 interchangeable seat panels:

- fixed toilet panel that can be used with or without a removable toilet pan
- removable plastic shower panel
- removable soft cushion seat panel

Shower and soft cushion seat panels can be disassembled whenever necessary to accommodate varied conditions, leaving the area more hygienic and cleaner.

- 180° easy opening and closing, flexible for movement

- hydraulic lifting adjustment up to 15 cm

- load capacity: 125 kg

- front swiveling castors with brake, one-way rear castors which prevents the machine from drifting due to unstable center of gravity when used by paralyzed people

Packing size: 79x63x33 cm.

Seat size: 48x37xh 42-57cm

3 IN 1  
TRANSFER CHAIR  
SHOWER CHAIR  
TOILET CHAIR



43430



Toilet panel with removable toilet pan

## COMMODE WHEELCHAIR

- 43202 FOLDING COMMODE WHEELCHAIR

- one-button foldable commode
- EVA seat and backrest with soft surface and odour free

- detachable seat and backrest pads

- rust-proof frame, made of aluminum alloy

- equipped with removable toilet pan

FOLDABLE

Packing size: 87x23.5x63 cm

Max. load: 125 kg

Weight: 9.4 kg



Folding footrest

PU rear wheels, Ø 30.5 cm

43202

Castors with brake, Ø 10 cm

## FOLDING BEDSIDE RAIL

- 27704 FOLDING BEDSIDE RAIL

It can be attached to the bed to assist and help those people who have difficulty moving, getting up and lying down.

One-click folding design frame: handle can be easily folded on both left and right side.

Easy to use, single hand operation.

- stepless height adjustment

- 3 levels of handle width adjustment

- comfortable PU handle lowers and raises by 180 degrees

- equipped with light for night-time use

- made of iron

Size: 64-84x63.5xh 73.5-91.5 cm. Weight: 3.95 kg

Packaging size: 60x46x36 cm

Max load: 125 kg

FOR ANY KIND OF BED





## SHELL MEDICINE CABINETS



27960



27960-1  
Closed cabinet



27961

### • 27960 SHELL MEDICINE CABINET - white

Structure in powder-coated aluminium profiles with resistant and durable melamine-faced wood particle panels.

- 8 internal adjustable shelves and lockable cabinet
- 20 unbreakable and recyclable transparent compartment trays (10 on each door).

Edged doors revolving on 270°, hinges complete with glass-filled nylon lock and handles.

4 powder-coated steel feet at the base with adjustable plastic insoles. Size: 910x600xh 1980 mm

### • 27961 SHELL PLUS MEDICINE CABINET - white

Structure made of powder-coated aluminium with melamine panels.

- 2 doors made of 20 mm thick wood particle panels edged in white ABS, revolving on 270°, hinges complete with glass-filled nylon lock and handles
- 20 unbreakable and recyclable transparent compartment trays (10 on each door)
- 5 adjustable shelves with a narcotic cabinet with lock
- 2 revolving panels with 40 unbreakable and recyclable transparent trays (20 on each panel).

4 powder coated steel feet Ø 60 mm with adjustable plastic insoles. Size: 930x600xh 1980 mm

## NEO PLUS TREATMENT TROLLEY

### • 45716 NEO PLUS TREATMENT TROLLEY

Treatment trolley made of ABS and antibacterial materials externally, while the internal structure is composed of steel and aluminium.

It is equipped with four castors Ø 10 cm (two with brake) and two drawers with ABS inserts, which can be freely organized. Size: 75x47.5x92 cm.



#### STANDARD ACCESSORIES

2 sharp containers 2 l  
2 ABS waste bins with lid

Dividers  
Hand sanitizer holder



45716


## NEO PLUS ANESTHESIA TROLLEY

### • 45718 NEO PLUS ANESTHESIA TROLLEY

Anesthesia trolley made of ABS and antibacterial materials externally, while the internal structure is composed of steel and aluminium. It is equipped with five big and deep drawers with dividers and four anti-static castors Ø 10 cm (two with brake).

Size: 75x47.5x93 cm  
Drawers inner size:  
2 drawers 42.4x37.5x6.8 cm  
2 drawers 42.4x37.5x11 cm  
1 drawer 42.4x37.5x22 cm

Central locking  
Pull-out worktop



45718

#### STANDARD ACCESSORIES

Central lock  
Pull-out worktop  
Dividers  
Utility container  
2 ABS waste bins with single lid  
10 anesthesia boxes  
Hand sanitizer holder  
Sharp container 2l

Foot pedal controls lids opening  
Removable container



## NEO PLUS EMERGENCY TROLLEY

### • 45720 NEO PLUS EMERGENCY TROLLEY

Emergency trolley made of ABS and antibacterial materials externally, while the internal structure is composed of steel and aluminium.

It is equipped with five big and deep drawers with dividers and 4 castors Ø 10 cm (two with brake). Size: 75x47.5x93 cm

Drawers inner size:  
2 drawers 42.4x37.5x6.8 cm  
2 drawers 42.4x37.5x11 cm  
1 drawer 42.4x37.5x22 cm



#### STANDARD ACCESSORIES

IV pole  
Defibrillator plate  
Pull-out worktop  
Dividers  
Power outlet  
Central lock  
Oxygen bottle holder  
Utility container  
CPR board  
Hand sanitizer holder  
2 sharp containers 2l  
2 ABS waste bins with lid



45720

## SUNLIGHT MINIOMNI™ ULTRASOUND-BASED OSTEOPOROSIS SCREENING

### • 56800 SUNLIGHT MINIOMNI™ ULTRASOUND-BASED OSTEOPOROSIS SCREENING with CM probe + MINIOMNI software

The Sunlight MiniOmni™ bone sonometer provides an exceptionally affordable, professional solution for early assessment of osteoporosis. It enables reliable, accurate, non-invasive and safe monitoring of bone density. Ultra-compact size and weight, intuitive ease of use and convenient USB-port connectivity to Windows™ 10 and above PCs and laptops. It's well-suited for use in any physician office or medical clinic, pharmacy, annual checkup centres or other retail venue.

#### Proven accuracy

MiniOmni™ is based on Omnipath™ quantitative ultrasound technology. This technology detects the speed of ultrasonic waves along the axis of maximum force of the bone, eliminating soft tissue effects and allowing for more precise results. It has been proven in thousands of installations worldwide.

#### Proven safety

Non-invasive and radiation free

#### Fast results

- no warm-up and calibration
- immediate audio confirmation of correct measurement
- screen a patient in just few minutes
- easy and fast to learn with built-in training module

#### Easily interpreted report in A4/letter format

- multiple ethnic reference databases for accurate results: Caucasian, Asian, Chinese, North and Latin American, European
- clear, colour-coded reports, easy to read and interpret
- patient data and measurement history
- gender and age (years 0-90) are taken into account
- WHO-compliant T-scores and Z-scores

#### Highly affordable, with fast ROI

- zero cost of operation: no ongoing maintenance, no disposables, no calibration

#### Optional Multi-Site licence (56805) for multiple skeletal measurement

It can measure multiple skeletal sites: radius, phalanx, tibia and metatarsal. Its flexibility improves the identification of isolated points of osteoporosis, as well as being able to test patients in whom the evaluation of certain skeletal sites is impossible.

#### STANDARD ACCESSORIES

|                                     |                                   |
|-------------------------------------|-----------------------------------|
| CM ultrasound probe                 | Handrest                          |
| Radius/Tibia measurement gauge      | Power supply 100-240 V and cable  |
| Skin marker                         | USB connection cable              |
| Ultrasonic gel                      | MiniOmni software installation CD |
| System Quality Verification Phantom | User guide GB, IT                 |

- maximum examiner comfort, no need to bend over
- maximum patient convenience, shoes can stay on
- ideal for immobile patients
- each site is proven to be correlated with osteoporosis

| GIMA code | ACCESSORIES                                     |
|-----------|---|
| 56802     | CM-PROBE for radius and tibia* - spare          |
| 56803     | CS-PROBE for 3rd phalanx - optional, need 56805 |
| 56804     | CR-PROBE for metatarsal - optional, need 56805  |
| 56805     | MULTI SITE LICENCE for use of CS and CR probe   |
| 56808     | CARRYING CASE                                   |

\*Tibia needs licence 56805

MiniOmni indicators and port:

- A - connection indicator LED
- B - measurement button
- C - measurement indicator LED
- D - probe connector
- E - MiniOmni probe
- F - probe holder



#### TECHNICAL SPECIFICATIONS

|                       |  |
|-----------------------|--|
| Measurement method:   | speed of sound (SOS)   |
| Technology:           | ultrasound Omnipath® Axial transmission  |
| Probe frequency:      | 1.25 MHz   |
| Measurement accuracy: | 0.25 to 0.5% accuracy  |
| Measurement time:     | approx. 1 minute per site  |
| Power supply:         | 7.5V 1.5 A   |
| Power consumption:    | 0.4 A  |
| Size:                 | 140x140xh 223 mm (not including probe holder)                                      |
| Weight:               | 1 kg   |
| Protection:           | BF Type applied part, internally powered with requirements for Class I or Class II |

## ELITE OVERBED TABLE

### • 27487 ELITE OVERBED TABLE

High quality overbed table with crank adjustment system. It features a base that allows closer access. It is equipped with 4 hidden castors to easily maneuver it anywhere. It can enhance patient well-being and comfort to elevate the quality of healthcare.

Size: 800x400xh 615-905 mm.


Max. load: 25 kg.

Weight: 11.5 kg.

Packaging size:

860x90x520 mm.

Delivered in kit form.

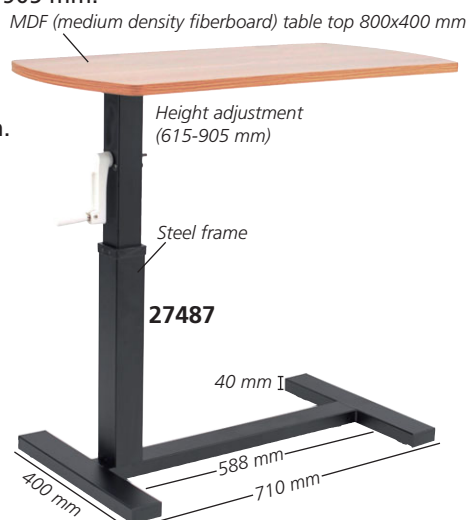

Folding handle



Castors Ø 16 mm

## MULTIFUNCTION STORAGE CABINET


### • 27959 MULTIFUNCTION STORAGE CABINET - light grey

Multifunction storage cabinet has a structure in powder-coated aluminium and profiles with resistant and durable melamine-faced wood particle panels.

- 2 doors with powder-coated aluminium edges with 5 mm tempered glass that rotate on 180° hinges with lock
- 4 adjustable shelves made of tempered glass

At the base 4 powder coated steel feet with adjustable plastic insoles, 200 mm height to facilitate cleaning.

Size: 750x400xh 1700 mm

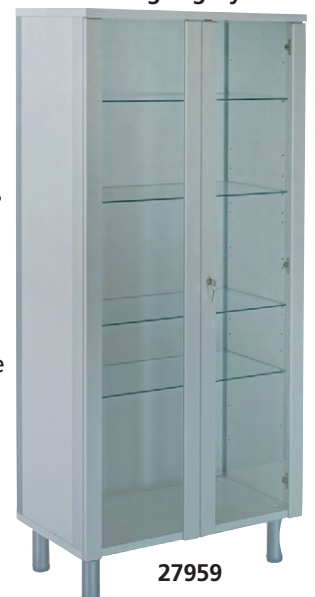

27959



## LUMEX LED LIGHT - 45,000 LUX

### • 49045 LUMEX LED LIGHT with handle - trolley

Compact LED light featuring a modern design combined with innovative lighting technology and excellent manoeuvrability. The light is significantly more pleasant to the eyes and colours are rendered accurately. Ideal for examinations and minor surgery procedures at doctor's office, clinics and hospitals. Ergonomic and hygienic design with removable and sterilizable handle which allows movements.



Directional handle

Control system to manage 5 levels of brightness

49045

#### TECHNICAL SPECIFICATIONS

|                                |   |
|--------------------------------|---|
| Light Intensity at 50/100 cm:  | 45,000 / 18,000 lux                                   |
| Control System:                | 5 levels of light-touch brightness control and on/off |
| Lamphead:                      | Ø 120 mm, 28 mm thickness                             |
| Diameter of illuminated field: | 180-300 mm at 50-100 cm distance                      |
| Light source:                  | 6 LEDs  |
| LED life:                      | 50,000 hours  |
| Colour temperature:            | 3500-4500 K   |
| Colour rendering index (CRI):  | 95  |
| Power supply:                  | 100-240V, 50/60 MHz                                   |
| Power consumption:             | 6W  |
| Protection:                    | Class II  |


## INFANT PHOTOTHERAPY LIGHT

### • 31192 LED INFANT PHOTOTHERAPY LIGHT - trolley

LED infant phototherapy light ideal for treating neonatal jaundice which consists in skin yellowing as a result of elevated levels of bilirubin in the blood. If untreated, severe jaundice can lead to brain damage, hearing loss and even death. Blue light irradiation (phototherapy) is a simple, effective and quick treatment for hyperbilirubinemia. It lowers bilirubin levels through a process called photo-oxidation which adds oxygen to bilirubin, facilitating its dissolution in water.

#### TECHNICAL SPECIFICATIONS

|                     |                        |
|---------------------|------------------------|
| Light source:       | blue LED, white LED    |
| LED life:           | 50,000 hours           |
| LEDs quantity:      | 48 (24 blue, 24 white) |
| Time range:         | 10-60 mins             |
| Radiant wavelength: | 400-500 nm             |
| Peak of wavelength: | 452-455 nm             |
| Effective area:     | 300x500 mm             |
| Irridance control:  | 5 levels               |
| Ebi uniformity:     | >0.4                   |
| Power supply:       | AC110V~240V 50/60Hz    |
| Input power:        | 55VA                   |

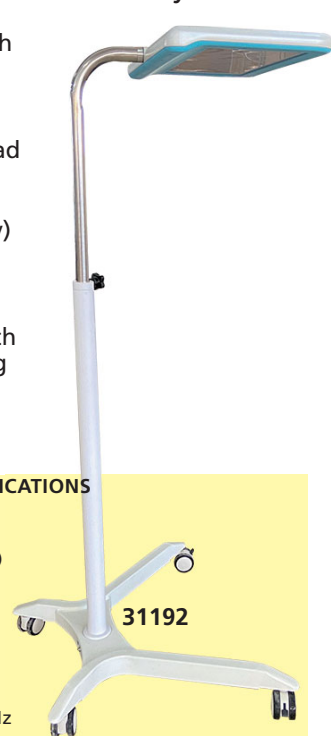

31192

#### 5 LEVEL IRRIDANCE CONTROL

|                                | Performance at 35 cm |         |         |         |         |
|--------------------------------|----------------------|---------|---------|---------|---------|
|                                | Level 1              | Level 2 | Level 3 | Level 4 | Level 5 |
| Spectral irradiance intensity: | 40                   | 51      | 58      | 73      | 83      |
| Ebi max:                       | 2700                 | 3300    | 3700    | 4600    | 5100    |
|                                | Performance at 50 cm |         |         |         |         |
| Spectral irradiance intensity: | 29                   | 35      | 38      | 52      | 60      |
| Ebi max:                       | 1800                 | 2200    | 2400    | 3200    | 3700    |

## GIMALED 29 LED LIGHTS - 160,000 LUX

GimaLed light with 29 LEDs: sophisticated design that combines excellent lighting features with exceptional mechanical characteristics for extra soft and stable movement.

**Deep light:** 9 fixed LEDs for central illumination and 20 LEDs (4 modules of 5 LEDs each) with electrical light field Ø control positioned laterally.

**Shadowless light:** 29 LEDs arranged on a round surface grant the best light emitting surface and avoid any shadow effect caused by any interposition between light beams and lighted surface.

**Bright light:** two colour selections, 4,500 and 5,000°K made of white LEDs only, to avoid coloured shadow effect.

- collimated light beams for a working distance from 70 to 140 cm
  - high colour rendering index (CRI) 96, R9>90
  - optimisation of LED thermal management by heat dissipation convection to avoid illuminance reduction during surgery
  - indirect light provides cool, deep illumination to avoid surgeon's eyes fatigue and dazzle effect. Parabolas reflect the full spectrum of light emitted by each LED in a point-like manner, without dispersion
  - light always in focus: different parabolas design allow to adjust electronically the Ø of the field
  - the EndoLed function provides comfortable illumination during endoscopic interventions. It illuminates a single module whose light intensity and colour temperature are individually adjustable
  - Zener to grant light even in the event of one LED failure
  - low consumption, high efficiency
- Electronic control of light adjustment, colour temperature, light field Ø and endoscopy light.



Small overall dimensions of cupola, perfectly balanced, ensure stable adjustment.

Ergonomic grip on the cupola and on the protective screen to hold and move the lamp

Light field diameter adjustment through touch sensitive handle or touch pad at the side of the cupola

Thin and easy-to-adjust reflector

160,000 LUX

MADE IN ITALY

49173

49170

#### TECHNICAL SPECIFICATIONS

|   |                               |
|---|-------------------------------|
| Light intensity at 1 m distance (Ec)                          | Klx 160, Klx 320 (only 49173) |
| 2 Colour temperature - switchable                             | °K 4,500 and 5,000            |
| Colour rendering index (CRI)                                  | Ra 96                         |
| Light field Ø (adjustable)                                    | 14-28 cm                      |
| Light field Ø where illuminance reaches 10% of Ec (d10)       | 200 mm                        |
| Light field Ø where illuminance reaches 50% of Ec             | 110 mm                        |
| Total radiated energy Ee where illumination reaches max level | 580 W/m²                      |
| Average LED life  | hours 60,000                  |
| Power supply:   | 100-240 V - 50-60 Hz - 51 W   |
| Regulations:  | IEC 60601-2-41 - EU 2017/745  |

| GIMA code | GIMALED 29   |
|-----------|--|
| 49170     | GimaLed - mobile - 160,000 Lux                           |
| 49171     | GimaLed - mobile with battery group and automat. charger |
| 49172     | GimaLed - ceiling* - 160,000 Lux                         |
| 49173     | GimaLed - ceiling** - double - 320,000 Lux               |
| 49197     | Autoclavable handle                                      |
| 49205     | Monitor holding arm - stand alone                        |
| 49220     | Special structure for high ceiling                       |
| 49175     | GimaLed wall remote control for 49170-49172              |
|           | Battery group available on request for all models        |

\*Ceiling >3.41 m needs 49220 \*\*Ceiling >3.53 m needs 49220



## GERATHERM® CLASSIC AND CLASSIC+ THERMOMETERS

Mercury-free glass thermometers developed by Geratherm® Medical AG, containing a patented liquid alloy consisting of gallium, indium and tin-called Galinstan. Galinstan is completely non-toxic and environment-friendly. They are ideal for determining body temperature of people of all ages, suitable for rectal, oral or axillary measurement. Each thermometer is calibrated to guarantee measurement accuracy.

- measuring range: 35.5°C to 42°C
- sustainable compared to digital thermometers
- easy to disinfect thanks to the closed glass body, ideal for allergy sufferers
- reset tool included

### "Easy flip" shaking aid

Thermometers include a reset tool "easy flip" which makes it easier to lead back the measuring liquid of the thermometers by considerably less effort when shaking down.

### Storage case with enlargement function (25532-33 only)

Special storage case with magnifying glass to help people read results more clearly.



25532

Supplied with individual box protective case, reset tool, storage case with magnifying lens (25532-33 only).and multilingual manual. Thermometers are sold in multilingual display of 24 pieces.



25529, 25530



25532, 25533

MADE IN GERMANY



| GIMA code | CLASSIC THERMOMETERS display of 24 boxes                        |
|-----------|---|
| 25529     | Classic therm - GB, FR, IT, ES, PT, DE, NL, NO, DK, FI, SE      |
| 25530     | Classic therm - GB, PL, LT, LV, EE, CZ, SK, SI, HU, HR, RS, RO  |
| GIMA code | CLASSIC+ THERMOMETERS display of 24 boxes                       |
| 25532     | Classic+ therm - GB, FR, IT, ES, PT, DE, NL, NO, DK, FI, SE     |
| 25533     | Classic+ therm - GB, PL, LT, LV, EE, CZ, SK, SI, HU, HR, RS, RO |

## INSECT BITE HELPER

### • 24394 INSECT BITE HELPER

Compact and portable device suitable for quick relieving itching, swelling or inflammation caused by insect bites or stings. During application, heat is applied to the treatment area; this can have a positive effect on the healing process.



- dual-switch over-temperature protection design, prevents skin burns due to high temperature
  - two modes with three temperature grades each. The set grade can be automatically saved
  - indicator lights for temperature level
  - low-battery indication
  - skin friendly and chemical free
- Supplied with USB cable and user manual in GB, FR, IT, ES, DE, PL.



## RIESTER SUPERVU AND SUPERVU HiRES GALILEAN BINOCULAR LOUPES

### SUPERVU GALILEAN BINOCULAR LOUPES

They offer 2.0, 2.5 or 3.0 X magnification which allows greater distance between the user and the patient. They provide a carefully calculated blend of comfort, clarity and field of view.

- excellent optical features with respect to the field view ( $\pm 10\%$ )
- movement whilst maintaining focal clarity is possible due to superior depth of field.

The lightweight aluminium bar with individual pupillary adjustment provides the mounted loupes with stability and optimal focal alignment, eliminating headache and eyestrain

- ideal for ocular and dental examinations as well as plastic surgery and veterinary professionals.



30965+  
30950-57

99 g (including frame).

### SUPERVU HiRES GALILEAN BINOCULAR LOUPES

They provide a high-resolution loupe, which far surpasses any previous standards. This 5-element loupe offers triple magnification with a 15% increased field of view, a bright image and a visually flat field from edge to edge.

- excellent optical features with respect to the field view ( $\pm 10\%$ )
- 3.0 X magnification
- excellent distinction, stunning performance as well as great looks
- ideal for most fields of surgery, surgical assistants as well as ophthalmologists



30966+  
30960-62



| GIMA code                                      | Riester code | SUPERVU GALILEAN BINOCULAR LOUPES    | Magnif. | Working distance | Field of view Ø |
|--|--------------|--------------------------------------|---------|------------------|-----------------|
| 30950  | 3960-620     | Binocular loupe                      | 2.0 X   | 340 mm           | 114 mm          |
| 30952  | 3960-625     | Binocular loupe                      | 2.5 X   | 340 mm           | 81 mm           |
| 30953  | 3961-625     | Binocular loupe                      | 2.5 X   | 420 mm           | 100 mm          |
| 30956  | 3960-630     | Binocular loupe                      | 3.0 X   | 340 mm           | 59 mm           |
| 30957  | 3961-630     | Binocular loupe                      | 3.0 X   | 420 mm           | 71 mm           |
| FRAME AND BAND FOR BINOCULAR LOUPES - optional |              |                                      |         |                  |                 |
| 30965  | 12770        | Spectacle frame, black without loupe |         |                  |                 |
| 30966  | 12771        | Brow band without loupe              |         |                  |                 |

| GIMA code                                      | Riester code | SUPERVU HiRES GALILEAN BINOCULAR LOUPES | Magnif. | Working distance | Field of view Ø |
|--|--------------|---|---------|------------------|-----------------|
| 30960  | 3970-630     | Binocular loupe                         | 3.0 X   | 340 mm           | 68 mm           |
| 30961  | 3971-630     | Binocular loupe                         | 3.0 X   | 420 mm           | 82 mm           |
| 30962  | 3972-630     | Binocular loupe                         | 3.0 X   | 460 mm           | 88 mm           |
| FRAME AND BAND FOR BINOCULAR LOUPES - optional |              |   |         |                  |                 |
| 30965  | 12770        | Spectacle frame, black without loupe    |         |                  |                 |
| 30966  | 12771        | Brow band without loupe                 |         |                  |                 |

## SMART NEBULIZER

### • 28123 SMART NEBULIZER

Easy-to-use single button operated compressor nebulizer for home and clinic use. Light and compact design.

Reliable pump with service life exceeding 1000 hours. It ensures highly efficient drug delivery for the treatment of asthma, allergies, and various respiratory diseases.

Supplied with inhalation tube, adult and child masks, inhalation mouthpiece, 2 air filters and multilingual manual in GB, FR, IT, ES, PT, DE, GR, RO, DK, HU, HR, BG.




CE 0123

28123

#### TECHNICAL SPECIFICATIONS

|                           |                                 |              |               |
|---------------------------|---------------------------------|--------------|---------------|
| Max. capacity:            | 10 ml                           | Air flow:    | > 7 l/min     |
| Operating mode:           | 20 min ON, 40 min OFF           |              |               |
| Max. pressure:            | 210~400 Kpa                     |              |               |
| Nebulizing pressure, rate | 60~180 Kpa; approx. 0.35 ml/min |              |               |
| Particle size:            | ≤ 5µm 60%                       |              |               |
| Altitude operating range: | 0-2000 m                        | Noise level: | approx. 55 dB |
| Voltage:                  | AC 230 V, 50 Hz, 0.7A; ≤ 80W    |              |               |
| Size - weight:            | 140x140x100 mm - 1.1 kg         |              |               |
| Safety:                   | Class II, Type BF               |              |               |

## ALLERGY RELIEVER

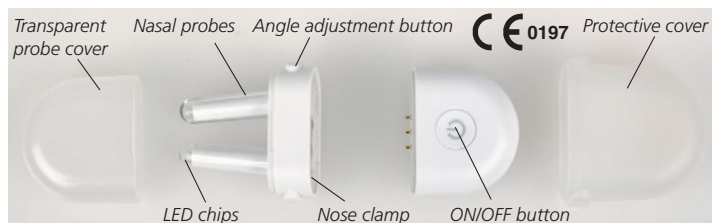

CE 0197

### • 28107 ALLERGIC RHINITIS RELIEVER

This device offers an innovative and effective treatment for the relief of symptoms associated with allergic rhinitis like watery eyes, runny nose and sneezing after a few treatments. Safe, quick, portable and easy to use. It works by using phototherapy of two different wavelengths: one (infrared light) produces small amounts of heat to improve blood flow and circulation and the second wavelength (red light) suppresses the cells that release histamine and lowers inflammation, thereby alleviating the irritating symptoms of allergic rhinitis.

- 3 minute treatment
- wireless nasal probes
- effective relief of allergy symptoms
- red light therapy
- one button operation

Medical Device Class IIa

Supplied with nose clamp, 2xCR 2032 batteries, protective cover and multilingual manual GB, FR, IT, ES, PT, DE, NL, SE, RO, GR.



#### TECHNICAL SPECIFICATIONS

|                   |  |
|-------------------|--|
| Treatment system: | dual wavelength phototherapy                   |
| Wavelength:       | 652 nm (red light); 940 nm (infrared light)    |
| Operating time:   | 3 minutes                                      |
| Light power:      | 3-6 mW per nostril                             |
| Power supply:     | 2xCR2032 alkaline batteries, 3V                |
| Size - weight:    | 70x39x17 mm - 21 g (without batteries)         |
| Classification:   | internally powered, Type BF applied part, IP22 |

28107



## WEARABLE MESH NEBULIZER

### • 28065 WEARABLE MESH NEBULIZER

CE 0051

Pocket size and wearable ultrasonic nebulizer for treatment of respiratory diseases.

Reliable quality, soundless operation and fine particle size. Self-cleaning mode: at the end of the treatment, the device mists pure water cleaning the mesh from medication residues.

- battery level indicator

- type-C charge port

- anti-corrosion material

- one-button operation

Supplied with adult mask, child mask, inhalation mouthpiece, built-in battery, type C cable and multilingual manual.



ON/OFF button

#### STANDARD ACCESSORIES



#### TECHNICAL SPECIFICATIONS

|                          |   |            |           |
|--------------------------|---|------------|-----------|
| Ultrasonic frequency:    | approx. 110 kHz                         | Head life: | 180 hours |
| Nebulizing:              | rate ≥0.2 ml/min                        | FPF:       | ≥ 60%     |
| MMAD:                    | < 5 µm                                  |            |           |
| Max./min. liquid volume: | 6 ml / 2 ml                             |            |           |
| Shutdown:                | automatic without liquid                |            |           |
| Power supply:            | built-in lithium battery 3.7 V, 300 mAh |            |           |
| Operating time:          | > 60 min.                               |            |           |
| Battery life:            | 500 cycles                              |            |           |
| Size - weight:           | 54x36x44 mm - 45 g                      |            |           |
| Liquid protection:       | IPX5                                    |            |           |

## JOLLY DIGITAL B.P. MONITORS



European Society Hypertension

CE 0197



32773

Adult cuff  
14 - 19.5 cm

Multilingual manual: GB, FR, IT, ES, DE, NL, SE, CZ, HU, RO

### • 32773 JOLLY WRIST BLOOD PRESSURE MONITOR

Professional Blood Pressure monitor for medical use.

- large easy-to-read illuminated LCD display 47x40 mm
- WHO blood pressure indicator
- arrhythmia detection (IHB)
- 4 user memories, each with 30 measured values, time and date
- average of all saved measured values and morning and evening blood pressure of the last 7 days
- automatic switch-off

Medical Devices Class IIa

Supplied with adult cuff, soft storage case, batteries

#### TECHNICAL SPECIFICATIONS

|                             |                              |
|-----------------------------|------------------------------|
| Measurement system:         | Oscillometric method         |
| Measurement range:          | Pressure: 0~300 mmHg ±3 mmHg |
|                             | Pulse: 40~180 pulse/min. ±5% |
| Power supply:               | 2x1.5 V AAA batteries        |
| Size:                       | 89x60x31 mm                  |
| Weight (without batteries): | 69.5 g                       |



## MAG 1000 HIGH FREQUENCY MAGNETOTHERAPY - 20 PROGRAMMES

CE 0068



28338

### • 28338 MAG 1000 MAGNETOTHERAPY - 2 channels - 20 programmes

Mag 1000 is a high frequency PEMF device particularly recommended for the treatment of pathologies affecting soft tissues like muscles and tendons. It offers 20 pre-set programmes with 3 adjustable intensity levels.

The device generates an electric signal with a carrier frequency of 27 MHz, which is modulated with specific frequencies (from 8 Hz to 640 Hz) and therefore is able to soothe the anatomical site affected by pain. It is projected and indicated for healing, rehabilitation and functional recovery treatments of many pathologies. Continuous operating mode. It is intended for both professional and homecare use.

Size: 153x91x38 mm

Supplied with elastic therapeutic belt, carrying bag, rechargeable battery pack 2,300mAh, battery charger, user manual in GB, FR, IT, ES, DE. Medical Device Class IIa.



28338

### 20 PROGRAMMES

|                           |                       |
|---------------------------|-----------------------|
| Arthritis-Arthrosis       | Bruises               |
| Rheumatisms               | Myalgia               |
| Pain-articular prosthesis | Tendonitis            |
| Herniated disc            | Hematoma              |
| Muscular pain             | Epicondylitis         |
| Osteoporosis              | Epytrocleitis         |
| Fractures                 | Lumbago               |
| Sprains                   | Muscular contractures |
| Dislocations              | 2h Medium application |
| Traumas                   | 4h Long application   |

## TAP 2000 MAGNETOTHERAPY MAT

### • 28339 TAP 2000 MAGNETOTHERAPY MAT for MAG 2000

TAP 2000 is a 40x40 cm mat with 2 cables of 3 solenoids each (total 6 solenoids), ideal for magnetotherapy treatments.

It is compatible with high intensity/low frequency pulsed electromagnetic field devices: MAG 2000, MAG 2000 Plus and MAG 2000 Premium.

Supplied with user manual in GB, FR, IT, ES, DE.

Class I Medical Device.

CE

28339



## KURA TENS - 2 CHANNELS

### • 28431 KURA TENS - 6 programmes - GB, FR, ES, PT, DE, NL, PL, CZ, SE, Arabic

### • 28432 KURA TENS - 6 programmes - IT, DK, LT, FI, HU, RO, HR, SI, GR, BG

Dual channel electrotherapeutic device with massage feature ideal for pain relief associated with aching muscles due to physical exertion or regular work and domestic activities.

It is also aimed at providing symptomatic relief and managing chronic and intractable pain, as well as pain relief related to arthritis. Medical Device Class II a.

- 2 channels with 4 electrode pads

- 15 intensities per channel


- 6 main modes (composite, thump, press, slap, acupuncture, muscular relaxation)

- 24 sub-modes (4 for each main mode)

- large LCD with blue backlight.

Supplied with 2 wires (120 cm), 4 electrode pads (50x50 mm) and multilingual manual (see above).

### • 28408 REUSABLE GELLED ELECTRODES 50x50 mm - bag of 4



28431, 28432

### TECHNICAL SPECIFICATIONS

|                        |  |
|------------------------|--|
| Output channels:       | 2  |
| Body parts:            | waist, back, arm, leg, joint, shoulder, adductor and gluteus, chest, belly, feet |
| Treatment duration:    | 15 to 30 minutes   |
| Band width:            | 0~100 us   |
| Pulse frequency range: | 0-100 Hz   |
| Output voltage:        | 0-60 V ± 20% (500 ohm load)  |
| Power supply:          | 4 x 1.5 V AAA batteries  |
| Size - Weight:         | 120.3x60.3x20.6 mm - 73 g (batteries excluded)                                   |
| Classification:        | internally powered, Type BF applied part, IP22                                   |

CE 0197

## MADRID SPHYGMOMANOMETER

### • 50000 MADRID ANEROID SPHYGMOMANOMETER

Professional, high quality sphygmomanometer with 0 to 300 mmHg scale. Two handling modes for right and left-hand users.

Large dial Ø 59.5 mm with PVC shockproof ring.

Zinc-alloy handle with nickel plated. Copper male and female connector.

Supplied with adult nylon cuff (22-32 cm) with D-ring, 1-tube PVC bladder, ribbed PVC bulb, black nylon bag and multilingual box and manual.



Luminescent dial



Male and Female connector



Left and Right hand use



50000

CE 0123


## X-CHECK B.P. MONITORS

- 49874 X-CHECK BLOOD PRESSURE MONITOR GB, FR, ES, DE, NL, SE, LT, PL, CZ, HR, RO, GR
- 49875 X-CHECK BLOOD PRESSURE MONITOR IT, PT, DK, NO, FI, LV, EE, SK, HU, SI, BG, Arabic

Accurate blood pressure monitor for home use.

- 2 users, 99 memories for each user
  - IHB detection and WHO indicator
  - average reading of last 3 measurements
  - time and date display
  - low battery indicator
  - it can work with type-C USB cable (not included)
- Supplied with cuff (22-42 cm), dustproof plastic bag, 4xAAA batteries and user manual (see above languages)
- 49877 ADULT CUFF 22-42 cm - spare

| TECHNICAL SPECIFICATIONS |  |
|--------------------------|--|
| Measuring method:        | oscillometric  |
| Blood pressure rate:     | sys 57~255 mmHg; $\pm 3$ mmHg<br>dia 25~195 mmHg; $\pm 3$ mmHg |
| Pulse rate:              | 40~199 bpm; $\pm 5\%$  |
| Operating mode:          | continuous operation   |
| Display:                 | LCD screen, 58.5x44.5x2.9 mm                                   |
| Cuff size:               | 22-42 cm   |
| Size-weight:             | 98x118x62.5 mm - 220 g without batteries                       |
| Power supply:            | 4xAAA batteries DC 6V or DC 5V type C cable                    |
| Automatic switch off:    | 1 minute   |
| Protection:              | internally powered supply, type BF, IP21                       |

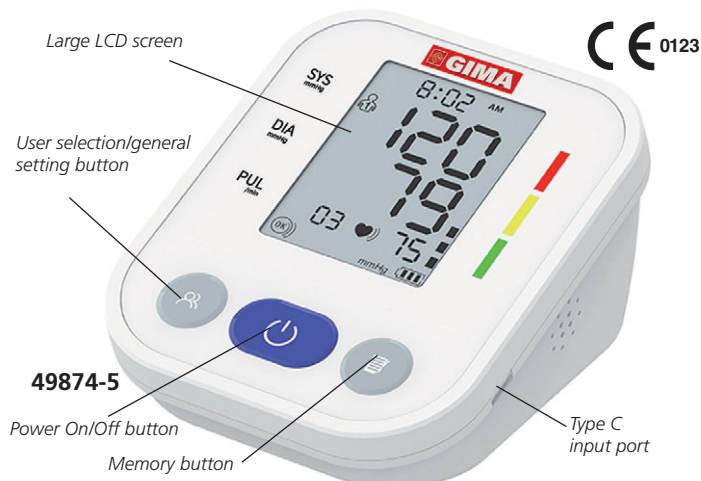


## OMRON COMPLETE BLOOD PRESSURE AND ECG MONITOR

- 49885 OMRON COMPLETE B.P. AND ECG MONITOR HEM-7530T-E3

The clinically validated OMRON Complete is an accurate 2-in-1 smart blood pressure monitor with single lead ECG recording that delivers easy, instant and accurate results. It can measure blood pressure only, ECG only or B.P. and ECG simultaneously. Quickly screen for a range of heart conditions at once, including: AFib, tachycardia, bradycardia and hypertension. In combination with a smartphone (not included), it records, stores and transfers results. Omron Complete can be connected to OMRON connect App to consult results. The device is intended for use by healthcare professionals, patients with known or suspected heart conditions and health-conscious individuals in a general household situation. Supplied with easy cuff 22-42 cm, 4xAA batteries, storage case and multilingual manual in GB, FR, IT, ES, DE, NL, DK, SE, PL, RU.



| TECHNICAL SPECIFICATIONS   |  |
|----------------------------|--|
| Device                     |  |
| BP display:                | LCD digital display  |
| Operating mode:            | continuous operation   |
| Power supply:              | 4 AA alkaline batteries, 1.5 V   |
| Battery life:              | approx. 300 measurements   |
| Size - weight:             | 232x123x98 mm - 550 g  |
| Cuff size:                 | 145x594 mm, (air tube: 750 mm)   |
| Safety:                    | Type BF, Type CF applied part  |
| Protection:                | IP21, internally powered ME equipment  |
| ECG                        |  |
| Lead:                      | single lead  |
| Input dynamic range:       | 10mV peak-to-peak  |
| Frequency response:        | 0.67 Hz to 40 Hz   |
| CMRR:                      | >60 dB   |
| Input impedance:           | >10 M $\Omega$   |
| Blood pressure measurement |  |
| Method:                    | oscillometric  |
| Measurement range:         | pressure: 0-299 mmHg; $\pm 3$ mmHg<br>pulse rate: 40-180 beats/min.; $\pm 5\%$ |
| Inflation:                 | automatic by electric pump   |
| Deflation:                 | automatic pressure release valve   |
| Internal memory:           | 90 readings  |



## OMRON PROFESSIONAL BLOOD PRESSURE MONITOR

- 49890 OMRON PROFESSIONAL B.P. MONITOR HBP-1120-E

The HBP-1120 is designed for use in professional settings and is clinically proven to produce fast and reliable results. Irregular heartbeats detection. It is intended for intensive daily use by healthcare professional in hospitals and medical facilities.

Zero Indicator function shows that the device is ready for next measurement. It works with AC adaptor or batteries. Class IIa. Supplied with cuff 22-32 cm, AC adapter, guarantee card and multilingual manual in GB, FR, IT, ES, DE, NL, TR, RU, Arabic.

- 49891 OMRON GS CUFF2 XS 12-18 cm - optional
- 49892 OMRON GS CUFF2 S 17-22 cm - optional
- 49893 OMRON GS CUFF2 M 22-32 cm - spare
- 49894 OMRON GS CUFF2 L 32-42 cm - optional
- 49895 OMRON GS CUFF2 XL 42-50 cm - optional

| TECHNICAL SPECIFICATIONS |  |
|--------------------------|--|
| Method:                  | oscillometric, auscultatory  |
| Measurement range:       | pressure: 0-300 mmHg; $\pm 3$ mmHg<br>pulse rate: 40-200 beats/min.; $\pm 5\%$ |
| Operating mode:          | continuous operation   |
| Display:                 | 7 segment LCD  |
| Power supply:            | AC adapter   |
| Input voltage:           | AC 100-240 V; 50/60 Hz   |
| Output voltage:          | DC 6V $\pm 0.5$ V  |
| Size - weight:           | 130x120x175 mm - 510 g   |
| Protection:              | Type BF applied part   |





## M5 AND M12 MULTIPARAMETER HOLTER - 5 OR 12 LEADS

### • 54299 M5 HOLTER MONITORING SYSTEM - 5 LEADS

### • 54300 M12 HOLTER MONITORING SYSTEM - 12 LEADS

The wireless multi-parameter holter is a lightweight and compact digital ambulatory ECG recorder. It is intended to display, record, store and transfer ECG data. Data must be checked by qualified medical personnel for analysis and diagnosis. Ideal for routine checkups or self-monitoring of patients in the clinical setting or at home, under healthcare professional supervision.

- compact design Ø 48 mm x 15.2 mm, less than 50g
- high-definition and real-time waveform display
- excellent input impedance, reducing waveform distortion
- data transmission to PC via USB, for efficient analysis
- built-in battery for continuous monitoring (up to 72 hours)
- 24 bit A/D conversion accuracy

### Advanced analysis capabilities

Professional ambulatory ECG analysis software, supporting rich statistical analysis. It supports template editing, atrial flutter and fibrillation analysis, HRV analysis, heart rate oscillation analysis, P-wave superposition analysis, ST-segment analysis and other advanced analysis functions.


### Easy and fast report output with high accuracy

High analysis accuracy allows to automatically exclude episodes that are too noisy.

### Multidimensional application scenarios

- disease diagnosis and prevention
- patient rehabilitation after cardiac surgery
- physical examination
- drug therapy assistance
- screening risk of cerebral stroke

Supplied with ECG lead wire (5 or 10 button type electrodes), 20 disposable adult electrodes, mini HDMI cable, magnetic charging cable, adjustable lanyard, AI-ECG tracker software (54315),

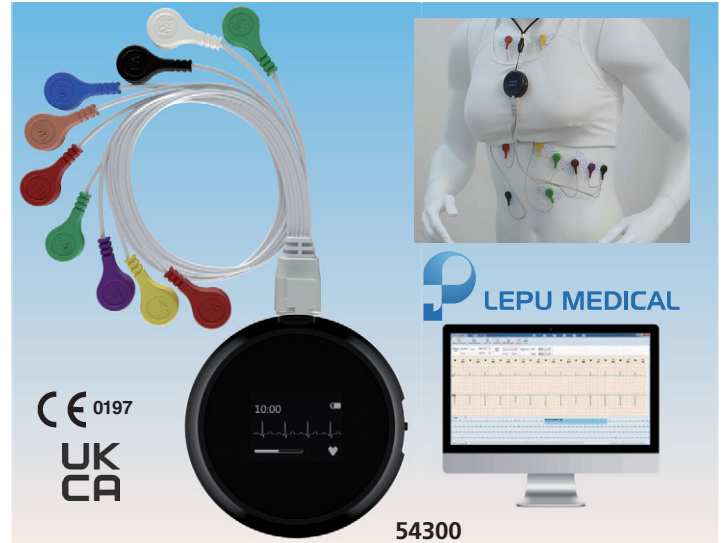

dongle, quick operation guide, manual and box in GB, FR\*, IT, ES\*, PT\*, DE\*, UA\*, RU\* \*Manuals can be downloaded on [www.gimaitaly.com](http://www.gimaitaly.com).

### • 54302 ECG LEAD WIRE - 5 ELECTRODES - spare

### • 54303 ECG LEAD WIRE - 10 ELECTRODES (12 LEADS) - spare for 54300

### • 54305 DISPOSABLE ECG ELECTRODES - adult - box of 10 - spare

#### TECHNICAL SPECIFICATIONS

|                |  |                     |                  |
|----------------|--|---------------------|------------------|
| Power supply:  | rechargeable lithium polymer battery, 3.8Vdc, 400mAh | Input resistance:   | ≥50MΩ, 10 Hz     |
| Charging time: | 2 hours  | Input signal range: | 10mV (p-v)       |
| Battery life:  | 72 hours, when fully charged                         | CMRR:               | ≥120 dB          |
| Voltage:       | 4.5~5.5 V DC   | Bandwidth:          | 0.05~40 Hz       |
| ECG            |  | Heart Rate          |                  |
| Leads:         | 3/5 leads (54299)<br>3/5/12 leads (54300)            | Measuring range:    | 30~250 bpm, ± 2% |
|                |  | Resolution:         | 1 bpm            |

## DYNAMIC ECG RECORDER 24h, 72h, 168h HOMECARE/PROFESSIONAL

### • 54310 DYNAMIC ECG RECORDER 24H

### • 54312 DYNAMIC ECG RECORDER 72H

### • 54313 DYNAMIC ECG RECORDER 168H



Wearable ECG recorder that is intended to measure, review and store adults' ECG data at home or in healthcare environment. It displays ECG waveform, heart rate, battery power and charging status.

- 0.49" display
  - 18 g, ergonomic design with flexible material
  - abnormal cardiac rhythm monitoring
  - up to 7 days real time ECG monitoring (54313 only)
  - data can be transmitted to smartphone via Bluetooth
  - free ViHealth App and AI ECG analysis software for real time ECG monitoring (homecare use)
  - optional AI ECG tracker software for professional use (54315)
- Supplied with charging cable, 10 disposable ECG electrodes (3.5 mm), AI ECG analysis software and multilingual manual in GB, FR, IT, ES, DE.

### AI ECG Analysis Software for homecare use

Data management software, which provides the ability to view, store, print and obtain automatic detailed reports of ECG data. It does not have diagnosis function, analysis, editing etc. It is suitable for consumers' personal use at home. PDF reports can be shared with doctors for diagnosis and evaluation.

### • 54315 AI ECG TRACKER SOFTWARE for professional use - optional

AI-ECG tracker is an advanced professional dynamic ECG diagnostic analysis system. It is certified as a software for medical devices and has complete dynamic ECG analysis function, suitable for the evaluation of adult ECG data and detection of arrhythmia-like heart abnormalities.

A cardiologist can edit, modify and confirm the diagnosis. Diagnosis accuracy rate of 95.2%. It supports template editing, atrial flutter and fibrillation analysis, HRV analysis, heart rate oscillation analysis, P-wave superposition analysis, ST-segment analysis and other advanced analysis functions.

### • 54314 DISPOSABLE ECG ELECTRODES - spare for 54310, 54312, 54313 - box of 10



#### TECHNICAL SPECIFICATIONS (54310, 54312, 54313)

|                       |   |
|-----------------------|---|
| Measuring method:     | electrode pads                                    |
| Lead:                 | single-lead                                       |
| Input impedance:      | ≥10MΩ, 10Hz                                       |
| CMRR:                 | ≥ 60 dB   |
| Frequency response:   | 0.67 ~ 40 Hz                                      |
| Sampling rate:        | 250 Hz  |
| Sampling accuracy:    | 16 bit  |
| Memory:               | up to 10 measurements                             |
| Power supply:         | rechargeable lithium battery<br>3.8V d.c., 240mAh |
| Battery working time: | 168 h   |
| Charging time:        | 2 hours   |
| Size - Weight:        | 100×23×10 mm - <20 g (with battery)               |
| Protection:           | Type BF, IP22                                     |

## POCKET ECG MONITOR

### • 33236 PCECG-500 POCKET ECG MONITOR - 6/12 LEADS

Portable, lightweight and easy to use ECG monitor. It provides collection, analysis, storage and transmission of 12-lead ECG information, which in combination with the Glasgow algorithm, ensures complete and immediate analysis. Automatic pacing detection and marking.

- **Glasgow algorithm:** provides an automatic analysis of the acquired ECG waveforms and output measurement values and diagnostic results
- remote reporting and data transfer via E-mail and Wi-Fi transmission
- connection to external printer via Wi-Fi
- HD camera
- more than 24 hours continuous working time
- 4.46" LCD colour touch screen
- automatic and R-R mode

#### STANDARD ACCESSORIES

- |  |                            |
|--|----------------------------|
| 1 ECG lead wire  | U-Disk (type C & USB port) |
| Disposable adult ECG electrodes (2 sets of 10 pcs)     | USB cable                  |
| Rechargeable lithium-ion battery                       |                            |
| Multilingual manual GB, FR, IT, ES, PT, DE, PL, GR, RU |                            |

|                     |  |
|---------------------|--|
| Method:             | peak-peak detection  |
| Measurement range:  | 30-300 bpm; $\pm 1$ bpm  |
| Leads:              | 6/12-lead synchronous acquisition and analysis   |
| Sensitivity:        | 2.5, 5, 10, 20 mm/mV; $\pm 5\%$  |
| Input impedance:    | $\geq 50M\Omega$ (10Hz)  |
| Sampling            | rate: 2000 samples/sec<br>modes: pre-sampling, real-time sampling, periodic sampling, triggered sampling |
| CMRR:               | $\geq 100dB$ (AC filter on)  |
| Frequency response: | 0.05Hz-150Hz+0.4dB(-3.0dB), 10Hz   |

#### TECHNICAL SPECIFICATION

|                |   |
|----------------|---|
| Time constant: | $\geq 3.2s$   |
| Filter:        | AC filter 50Hz, 60Hz, Off<br>EMG (Electromyography) filter 25Hz, 35Hz, 45Hz, Off<br>ADS (Anti-Drift System) filter 0.05Hz, 0.32Hz, 0.67Hz<br>Lowpass filter 75Hz, 100Hz, 150Hz, Off |
| Speed:         | 5, 6.25, 10, 12.5, 25, 50 mm/s; $\pm 3\%$   |
| Power supply:  | built-in rechargeable lithium-ion battery, 3.8V 6000mAh   |
| Charging time: | 8 hours   |
| Display:       | 4.46" colour LCD touchscreen, 480x854 pixels resolution   |
| Size - weight: | 134x74x17 mm - 250 g (including battery)  |



Easy to use, light and portable.  
It only weighs 250 g, about the size of a smartphone

6/12 lead waveform supports synchronous acquisition and display of 6/12 lead waveform, as well as heart rate detection and indication of poor electrode contact.



33236

## CARDIONICA™ PORTABLE SINGLE-LEAD ECG

### • 33234 CARDIONICA™ 1 CHANNEL ECG with AFib and Bluetooth® 4.0

Medical-grade single-lead ECG, ideal for heart rhythm check and immediate detection of arrhythmias, atrial fibrillation, tachycardia, bradycardia, as well as stroke prevention. Display with coloured LED indicators and internal memory up-to 100 tests. Noise reduction and motion artefact detection. **One minute test:** heart rhythm tracking in one minute, everywhere, with the accuracy of a clinical setting.

**Real time ECG:** immediate detection of possible heart problems. **Stand alone or via App:** applying the adhesive electrode on the chest, it can be used in stand-alone mode or connected to smartphone via Bluetooth.

**Free Cardionica App for data sharing:** it allows to track personal ECG and to share reports in PDF and EDP format via E-mail, WhatsApp and other Apps.

**Certified accuracy:** ECG analysis in line with 2020 AF guidelines (ECG, P-wave, RR irregularity), accurate in compliance with international Standard IEC 60601-2-47.

Supplied with 4 reusable electrodes, button battery CR2032 and multilingual manual GB, FR, IT, ES, PT, DE, NL, PL, SE, TR. Medical Device Class IIa MED 9826.

### • 33235 CARDIODOT REUSABLE ECG ELECTRODE 13x4.5 cm for Cardionica - box of 5


Each electrode can be used for about 30 times.

CE 0476

**MIR**  
MEDICAL INTERNATIONAL RESEARCH



Phone not included



Cardionica  
Cardionica display

Download on the App Store  
GET IT ON Google play



33234

#### TECHNICAL SPECIFICATION

|                  |                         |                |                             |                   |                                       |
|------------------|-------------------------|----------------|-----------------------------|-------------------|---------------------------------------|
| Lead:            | single lead             | Sampling rate: | 250 S/s                     | Current capacity: | 210 mAh                               |
| CMRR:            | 100 dB 50Hz             | Memory:        | 100 ECG, 1 minute each      | Battery:          | 300 uses or 2 years                   |
| Accelerometer:   | tri-axial accelerometer | LEDs:          | green, orange, red          | Protection:       | internally powered, type BF           |
| Input impedance: | > 10 MOhm               | Power supply:  | lithium battery 3V (CR2032) | Size - weight:    | 57x37x15 mm - 20 g (battery included) |

## HOT-COLD THERMY GEL

### • 28593 HOT-COLD THERMY GEL 14x18 cm - box of 25

### • 28594 HOT-COLD THERMY GEL 11x26 cm - box of 25

Non-toxic and reusable hot/cold gel suitable for medical purposes. These gel packs are microwave and boiling water-safe, making them ideal for heat therapy: lumbago, stiff-neck, rheumatism, hypothermia and whenever hot application is required. When placed in the freezer, they are perfect for cold therapy: haematomas, sprains, injuries, hyperthermia and whenever cold application is required. Thermy gel 28594 can be used with a cover (28596) to prevent burns. Class I, Medical Device.

### • 28596 COVER WITH FASTENING VELCRO 25.5x12.5 cm for 28594



28593

CE

28594

28594+28596

Multilingual pack and instructions in: GB, FR, IT, ES, PT, DE, PL, NL, CZ, DK, SE, FI, EE, LT, LV, SK, SI, RO, HU, HR, GR, BG.



## BOFAP CARDBOARD BACTERIAL FILTER-MOUTHPIECE FOR SPIROMETERS

BOFAP is a patented viral bacterial filter made of cardboard for spirometry examinations. It combines the convenience of the mouthpiece with the usefulness of the filter. It reduces the risk of cross-contamination among patients and helps to maintain equipment hygiene. A bag of filter material is welded inside the mouthpiece to stop the same quantity of particulates of BV filters. Laboratory tests have verified the ability to catch of up to 99.99% of particulate matter as small as 0.2 microns in size.

BOFAP is fully recyclable and reduces plastic usage by 99%  
- reduced risk with lower costs than traditional plastic filters  
- filtration efficiency comparable to plastic filters (above 99.99%)

Multilingual instructions: GB, FR, IT, ES, PT, DE, NL, DK, SE, FI, LT, LV, EE, PL, CZ, SK, HU, SI, HR, RO, BG, GR

**FILTER EFFICIENCY 99.99%**

Each filter is individually packed and labelled in transparent biodegradable film.



| BOFAP BACTERIAL FILTERS - disposable |                    |  |                       |
|--------------------------------------|--------------------|--|-----------------------|
| GIMA code                            | Internal x outer Ø | Compatible with                                | Minimum order         |
| 33909                                | 28 x 30 mm         | Micromedical, MIR, Vitalograph, Contec, Viasys | dispenser of 200 pcs. |
| 33910                                | 28 x 30.5 mm       | Cosmed   | dispenser of 200 pcs. |

\*For spirometers produced up to 2021

## VACUUM SPLINT KIT

### • 34690 VACUUM SPLINT KIT

The kit includes vacuum splints for arm, elbow and leg, nylon bag and pump. Made of high quality and durable TPU material, filled with harmless EPS particulate material. Suitable for X-ray and CT scan. The firmness of the splints can be adjusted by pumping air according to the situation. Quick and easy softness and hardness adjustment of the splint. Packaging size: 50x28x22 cm



Carrying bag and 0.25 l pump included



## SILENT OXYGEN CONCENTRATOR 5 L

### • 34606 SILENT OXYGEN CONCENTRATOR 5 L

Medical grade, silent, small oxygen concentrator for home use. Provide high oxygen concentration through nasal cannula. Work continuously. Supplied with filter, humidifier bottle, nasal cannula and manual GB, IT. Class II, Type BF

- 34599 CYLINDRICAL PAPER FILTER for 34603, 34606 - box of 10
- 34609 RECTANGULAR PAPER FILTER for 34606 - box of 10
- 34608 HUMIDIFIER BOTTLE - spare
- 34167 OXYGEN MASK with tube - pediatric
- 34166 OXYGEN MASK with tube - adult
- 34172 OXY GLASSES - nasal cannulas

#### TECHNICAL SPECIFICATIONS

|                                   |                         |
|-----------------------------------|-------------------------|
| Flow range:                       | 0.5 ~ 5 l/min           |
| Oxygen concentration:             | 95.5 - 87 %             |
| Output pressure:                  | 70 kPa                  |
| Input power:                      | 350 VA                  |
| Noise level (front - whole unit): | ≤45 dBA                 |
| Size - weight:                    | 40x30xh 55 cm - 17.5 kg |
| Packing size:                     | 48x40xh 63 cm           |
| Operating voltage:                | 230 V - 50 Hz           |
| Optimal oxygen concentration:     | after 15 min.           |

CE 0123

**yuwell**  
Top manufacturer  
over 200,000 pcs/years



## SPIRIT PORTABLE OXYGEN CONCENTRATOR 1 LITRE

### • 34589 SPIRIT PORTABLE OXYGEN CONCENTRATOR 1 L

Portable and silent oxygen concentrator designed to provide a reliable and efficient source of oxygen. It provides high concentration of oxygen to patients with respiratory disorders. Its compact design and ease of transport is ideal for those who require continuous oxygen therapy anywhere.

- 4 settings for regulating the amount of oxygen delivered
- detachable molecular sieve
- 0.02 s response
- oxygen generation by impulses
- modular lithium battery
- automatic warning system

Supplied with rechargeable lithium-ion battery, AC power supply + DC power cable, 1 set of felt filter (2 pieces), nasal cannula, carrying bag with protective case and adjustable shoulder strap, manual in GB, IT.

- 34592 SPIRIT FILTER - box of 10 (5 sets of 2)

#### TECHNICAL SPECIFICATIONS

|                               |  |
|-------------------------------|--|
| Flow range:                   | 3.5 l/min                                      |
| Oxygen concentration:         | 96-90%   |
| Output pressure:              | 150 kPa  |
| Operation noise level:        | ≤ 55 dBA                                       |
| Input power:                  | 120 W  |
| Voltage:                      | AC 100-240 V, 50/60 Hz                         |
| Battery:                      | DC 14.4 V                                      |
| Power Supply:                 | DC 12V-24 V                                    |
| Optimal oxygen concentration: | after 30 min                                   |
| Size:                         | 22x8xh 22 cm                                   |
| Packing size:                 | 32x32xh 21 cm                                  |
| Weight:                       | 2.2 kg (with battery)                          |
| Classification:               | Class II equipment, type BF applied part, IP20 |

CE 0123  
**yuwell**  
Top manufacturer  
over 200,000 pcs/years



## SHANGRILA 510S EMERGENCY VENTILATOR

### 8 VENTILATION MODES

CE 0123

56600



Simple operation, compact design, reliable performance

- waveform display and multi-parameter monitoring
- electronically controlled PEEP
- direct access to critical settings and patient data
- anti-crash design
- acoustic and visual alarms

#### Safety Guarantee

- complies with EN1789 standard
- IPX4 waterproof level

### 56600 SHANGRILA 510S EMERGENCY VENTILATOR

Multi-functional emergency transport ventilator which combines advanced technology and versatile ventilation functions.

Pneumatically driven electronically controlled ventilation system.

The device meets different needs of ventilation, covering various situations.

Suitable for adults, pediatric and infant patients.

#### Features:

- interface available in: GB, FR, IT, ES, PT
- waveform display and multiparameter monitoring
- 5" LCD display
- acoustic and visual alarms
- direct access to critical settings and patient data
- anti-crash design
- operate with low flow oxygen supply
- pre-use test
- FiO<sub>2</sub> 40% to 100% continuously adjustable
- alarm silence

#### 8 ventilation modes:

- A/C: the ventilator delivers only mandatory breaths. When the ventilator detects patient inspiratory effort, it delivers a patient-initiated mandatory (PIM) breathe;
- A/C-V (Volume Control Ventilation): mandatory ventilation with preset respiratory frequency and tidal volume;
- A/C-P (Pressure Control Ventilation): mandatory ventilation with preset respiratory frequency and pressure limit;
- A/C + SIGH: based on A/C mode, the difference is a high tidal volume (1.5 times as set) delivered every 100 breaths;
- SIMV (Synchronized Intermittent Mandatory Ventilation): mixed ventilator mode that allows both mandatory and spontaneous breaths;
- CPAP (Continuous Positive Airway Pressure): ventilator delivers a continuous flow that always maintains positive pressure flow, throughout inspiration phase of ventilation;
- SPONT (spontaneous): inspiration is usually initiated by patient effort. Breaths are initiated via pressure or flow triggering, whichever is currently active;
- Manual: manual breath, inspiratory hold.

| GIMA code | ACCESSORIES                                     | Minimum order |
|-----------|---|---------------|
| 34502     | Oxygen cylinder 2.0 l UNI standard with reducer | 1             |
| 34522     | Oxygen cylinder 2.0 l NF standard with reducer  | 1             |
| 34035     | Corrugated PVC tube - 117 cm                    | 1             |
| 34036     | Patient circuit (valve + corrugated tube)       | 1             |
| 56607     | Air filter sponge - spare                       | box of 5      |
| 56610     | Ni-Mh battery - spare                           | 1             |
| 56611     | Hanging plate for ambulance - optional          | 1             |



#### Applications

- Emergency - Transport
- Intra-hospital transfer - Recovery

#### Multiple ways of power supply

- 4.5 h long lasting internal battery
- A/C power adaptor
- Vehicle D/C power cable (on request)



Carrying bag equipped with bracket assembly



56600 + 34502

#### TECHNICAL SPECIFICATIONS

|                               |  |  |  |
|-------------------------------|--|--|--|
| Ventilation modes:            | A/C, A/C-V, A/C-P, A/C+SIGH, SIMV, CPAP, SPONT, Manual | Patient type: adult, child, infant (>3.5 kg) | Monitoring   |
| Parameters                    |  |  | Pressure value: Volume / Flow value: Time value: Real time curves: Supply gas: Battery: Battery operating time: Power supply: Maximum security pressure: Compliance: Noise: Size - weight: |
| Tidal volume:                 | 0~2,000 ml   |  | Ppeak, PEEP  |
| Respiration rate:             | 1~120 bpm (A/C mode)                                   |  | Vt, MV   |
|                               | 1~40 bpm (SIMV mode)                                   |  | ftotal   |
| I:E Ratio:                    | 1:10~4:1   |  | pressure-time, flow-time   |
| FiO <sub>2</sub> :            | 40%~100%   |  | O <sub>2</sub> , 0.25~0.6 MPa  |
| Pressure trigger sensitivity: | -20~0 cm H <sub>2</sub> O                              |  | rechargeable built-in battery  |
| Flow trigger:                 | 2~30 l/min   |  | 4.5 hours  |
| PEEP:                         | 0~30 cm H <sub>2</sub> O                               |  | AC 100~240 V, 50/60 Hz, ≤65 V A  |
| Inspiration flow:             | Max. 90 l/min  |  | ≤ 8 KPa  |
|                               |  |  | ≤ 4 ml /100 Pa   |
|                               |  |  | ≤ 65dB(A)  |
|                               |  |  | 168x156x300 mm - 3.2 kg (device only)  |

#### STANDARD ACCESSORIES

- Patient circuit
- 1 l test lung
- Filter
- 2 m oxygen pipeline
- Sampling tubes
- AC power adapter cable
- Carrying bag with bracket assembly
- Integrated battery
- User manual GB, FR, IT, ES, RU\*

\*Available only on [www.gimaitaly.com](http://www.gimaitaly.com)